
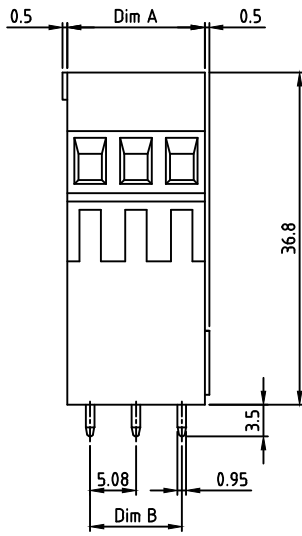
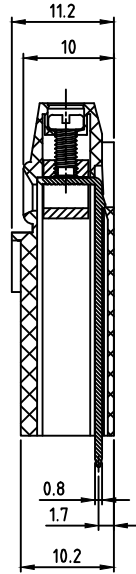

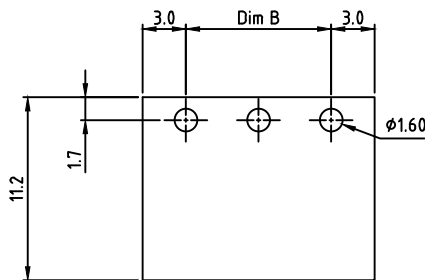


## SPECIFICATIONS


Voltage Rating: 300VAC  
 Current Rating: 10 Amps  
 Dielectric withstanding: 1.6KV  
 Soldering Temperature: 250°C±10°C/5 Sec  
 Operating Temperature: -40°C to +115°C  
 Wire Guard Solder Pin: Brass, Tin Plated  
 Terminal Screw: Steel Zinc plating "-" slot type  
 Insulator Material: Thermoplastic, UL 94V-0  
 Wire Range:  
 Wire Strip Length: 6-7mm  
 Solid/Stranded Wire: 12-24 AWG  
 Torque: 3.5Lb-In  
 Clamp: Brass(CuZn) Ni plated  
 Screw: M2.5  
 Safety Approval: us




N=Number of contacts



Dimensions	
A	N×5.08
B	(N-1)×5.08
Poles	Dim A
2P-4P	±0.15
5P-8P	±0.25
9P-16P	±0.35
17P-24P	±0.40

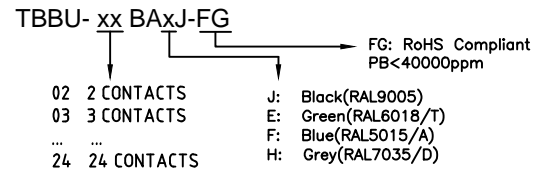

**APTOS Technology CONFIDENTIAL**  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X.' ± 1"
.X ± 0.30	.X" ± 1"
REV. C	DRAWN
DATE 06/30/2017	CHECKED
SCALE As shown	APPROVED
UNIT mm	

# APTOS TECHNOLOGY

**TBBU Series**  
 5.08 mm Terminal Block - 3rd Level  
 PRODUCT NO. TBBU-XXBAXJ-FG  
 FILE NAME: TBBU-XXBAXJ-FG LF APD.DWG