

SPECIFICATIONS



Voltage Rating: 300VAC
 Current Rating: 10 Amps
 Dielectric withstanding: 1.6KV
 Soldering Temperature: 250°C±10°C/5 Sec
 Operating Temperature: -40°C to +115°C
 Wire Guard Solder Pin: Brass, Tin Plated
 Terminal Screw: Steel Zinc plating "- " slot type
 Insulator Material: Thermoplastic, UL 94V-0
 Wire Range:
 Wire Strip Length: 6-7mm
 Solid/Stranded Wire: 12-24 AWG
 Torque: 3.5Lb-In
 Clamp: Brass(CuZn) Ni plated
 Screw: M2.5
 Safety Approval: 

TBBU- xx JAXJ-FG

02 2 CONTACTS
 03 3 CONTACTS
 ...
 24 24 CONTACTS


FG: RoHS Compliant
 PB<40000ppm

J: Black(RAL9005)
 E: Green(RAL6018/T)
 F: Blue(RAL5015/A)
 H: Grey(RAL7035/D)

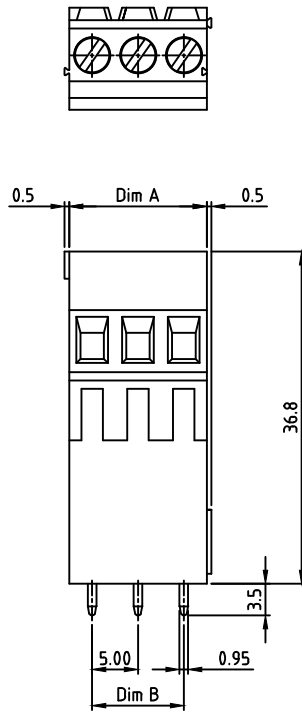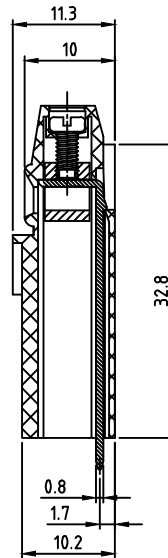

N=Number of contacts

Dimensions	
A	N×5.00
B	(N-1)×5.00
Poles	Dim A
2P-4P	±0.15
5P-8P	±0.25
9P-16P	±0.35
17P-24P	±0.40

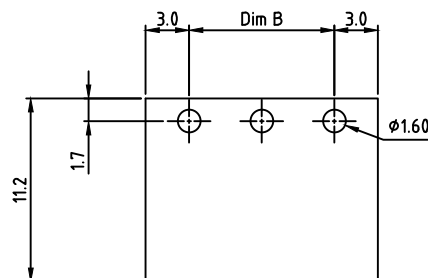

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X' ± 1'
.X ± 0.30	.X' ± 1'
REV. A	DRAWN
DATE 06/30/2017	CHECKED
SCALE As shown	APPROVED
UNIT mm	



11/23/10	TBBU Series
5.0 mm Terminal Block - 3rd Level	
PRODUCT NO. TBBU-XXJAXJ-FG	
FILE NAME: TBBU-XXJAXJ-FG LF APD.DWG	