

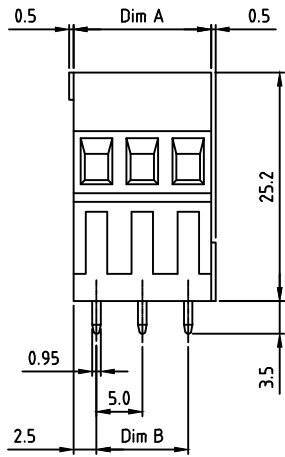
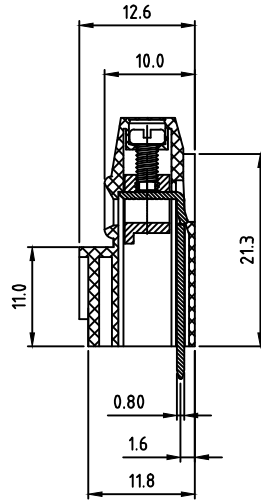


SPECIFICATIONS

- Voltage Rating: 300VAC
- Current Rating: 10 Amps
- Dielectric withstanding: 1.6KV
- Soldering Temperature: 250°C±10°C/5 Sec
- Operating Temperature: -40°C to +115°C
- Wire Guard Solder Pin: Brass, Tin Plated
- Terminal Screw: Steel Zinc plating "-" slot type
- Insulator Material: Thermoplastic, UL 94V-0
- Wire Range:
- Wire Strip Length: 6-7mm
- Solid/Stranded Wire: 12-24 AWG
- Torque: 3.5Lb-In
- Clamp: Brass(CuZn) Ni plated
- Screw: M2.5
- Safety Approval: us



N=Number of contacts

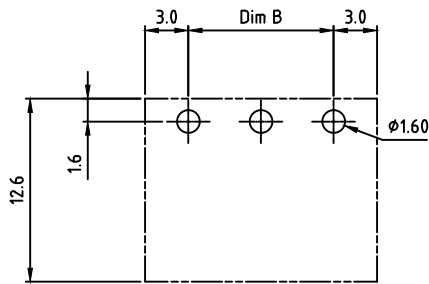

Dimensions	
A	N×5.00
B	(N-1)×5.00

Poles	Dim A	Dim B
2P-6P	±0.15	±0.15
7P-12P	±0.25	±0.25
13P-18P	±0.35	±0.35
19P-24P	±0.40	±0.40

TBBV-xx JAxJ-FG

- 02 2 CONTACTS
 - 03 3 CONTACTS
 -
 - 24 24 CONTACTS
- FG: RoHS Compliant
PB<4000ppm
- J: Black(RAL9005)
 - E: Green(RAL6018/T)
 - F: Blue(RAL5015/A)
 - H: Grey(RAL7035/D)

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
xxx. ± x	.xx ± 0.10	<div style="font-size: 1.5em; font-weight: bold;">TBBV Series</div> <div style="font-size: 0.8em;">5.0 mm Terminal Block - 2nd Level</div> <div style="font-size: 0.7em;">PRODUCT NO. TBBV-XXJAXJ-FG</div> <div style="font-size: 0.6em;">FILE NAME: TBBV-XXJAXJ-FG LF APD.DWG</div>	
xx. ± x	.xxx ± x		
x. ± 0.50	x' ± 1"		
.x ± 0.30	.x' ± 1"		
REV. A	DRAWN	11/17/10	
DATE 06/29/2017	CHECKED		
SCALE As shown	APPROVED		
UNIT mm		SIZE A4	