


SPECIFICATIONS

Voltage Rating: 300 VAC
 Current Rating: 10 Amps
 Wire Strip Range: 6–7mm
 Dielectric withstanding: 1.6KV
 Wire Range: 12–24 AWG
 Operating Temperature: –40°C~+115°C
 Max Processing Temp: 250°C±10°C for 5 seconds
 Clamp: Brass, Tin Plated
 Terminal Screw: Steel, Zinc Plated, "–" Slot Type
 Solder Pin: Brass with Tin Plated
 Insulator Material: Thermoplastic UL 94V–0
 Torque: 3.5in–lb
 Screw: M2.5
 Safety Approval: 

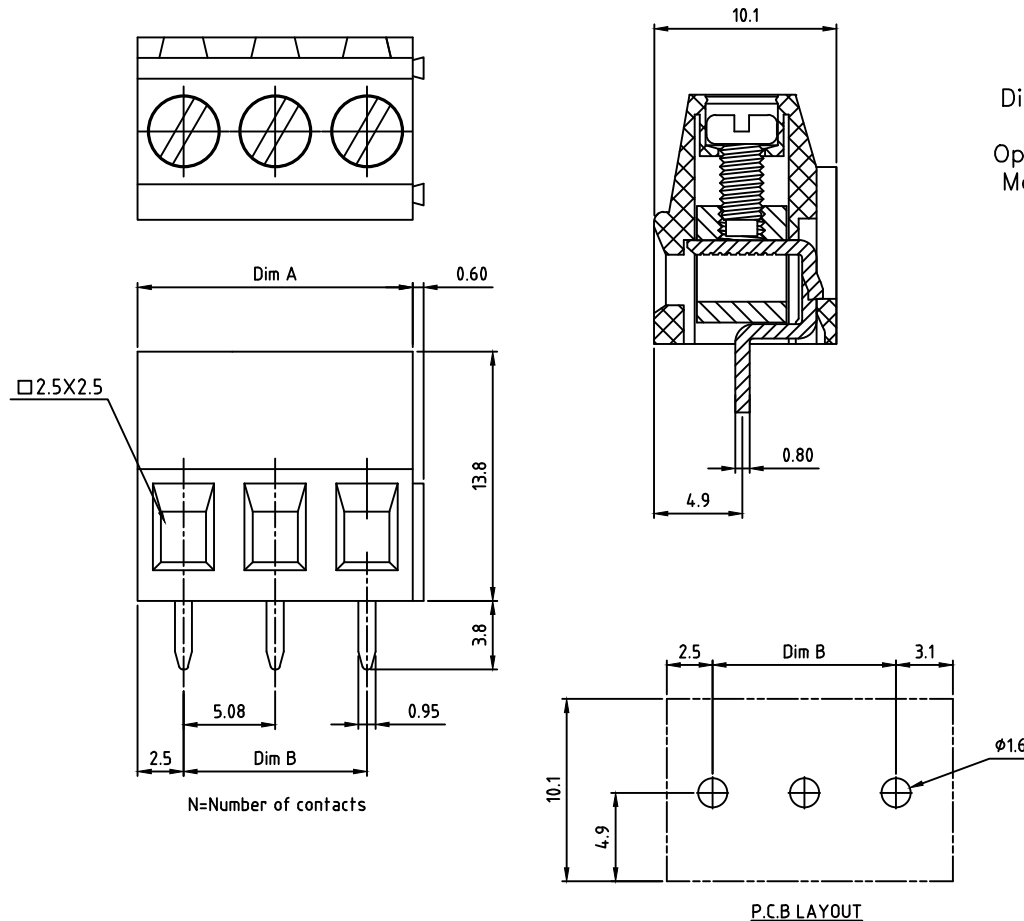

TBBW-xx BAXJ-FG

02 2 CONTACTS
 03 3 CONTACTS
 ...
 24 24 CONTACTS

FG: RoHS Compliant
PB<40000ppm

J: Black(RAL9005)
 E: Green(RAL6018/T)
 F: Blue(RAL5015/A)
 H: Grey(RAL7035/D)

P.C.B LAYOUT

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim A	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
Dim B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
Tolerance	±0.15					±0.20					±0.25	
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	
Dim B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
Tolerance	±0.25					±0.30						

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	± X	.XX	± 0.10
XX.	± X	.XXX	± X
X.	± 0.50	X.	± 1"
.X	± 0.30	.X	± 1"
REV.	C	DRAWN	06/30/05
DATE	06/29/2017	CHECKED	
SCALE	As shown	APPROVED	
UNIT	mm		SIZE A4



TBBW Series
 5.08 mm Terminal Block – 1st Level
 PRODUCT NO. TBBW–XXBAXJ–FG
 FILE NAME: TBBW–XXBAXJ–FG LF APD.DWG