

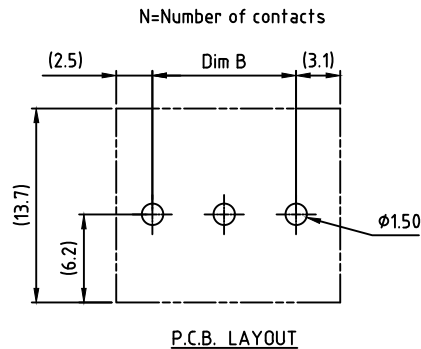
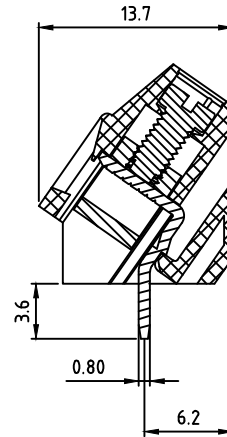


SPECIFICATIONS

Voltage Rating: 300VAC
 Current Rating: 10 Amps/10 Amps
 Dielectric withstanding: 1.6KV/2.5KV
 Operating Temperature: -40°C to +115°C
 Wire Guard: PhBz, Tin Plated
 Terminal Screw: Steel Zinc plating "-" slot type
 Insulator Material: Thermoplastic, UL 94V-0
 Wire Range: 0.2-2.5mm
 Wire Strip Length: 6-7mm
 Solid/Stranded Wire: 14-26 AWG
 Torque: 3.5Lb-In/0.4Nm
 Screw: M2.6
 Terminal Body: Brass(CuZn)
 Safety Approval: 

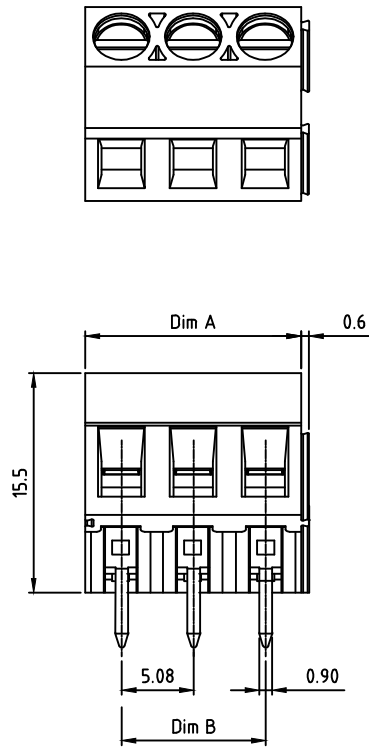

N=Number of contacts

Dimensions	
A	N×5.08
B	(N-1)×5.08
Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

TBGB-xx BA x A -FG

02 2 CONTACTS
 03 3 CONTACTS

 24 24 CONTACTS

FG: RoHS Compliant
(Lead <4% in Copper Alloy)


J: Black(RAL9005)
 B: Red(RAL3001/D)
 C: Orange(RAL2011/P)
 D: Yellow(RAL1018/A)
 E: Green(RAL6018/T)
 F: Blue(RAL5015/A)
 H: Grey(RAL7035/D)
 I: White(RAL1102)
 3: Green(RAL6018/U)

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED

XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X.' ± 1'
.X ± 0.30	.X' ± X'

AP APTOS TECHNOLOGY

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

REV. C	DRAWN	01/28/06
DATE 06/29/2017	CHECKED	
SCALE None	APPROVED	
UNIT mm		SIZE A4

TBGB Series	
5.08 mm 45° Terminal Block	
PRODUCT NO. TBGB-XXBAXA-FG	
FILE NAME TBGB-XXBAXA-FG APD.DWG	