
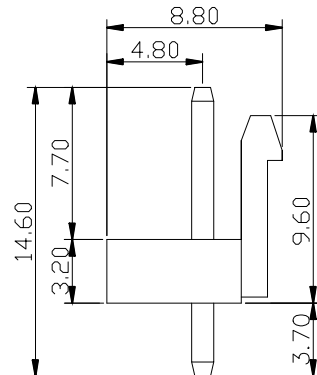


Poles	Dimension mm (in.)	
	A	B
02	3.96 (0.156)	7.92 (0.312)
03	7.92 (0.312)	11.92 (0.469)
04	11.88 (0.468)	15.84 (0.624)
05	15.84 (0.624)	19.84 (0.781)
06	19.80 (0.780)	23.80 (0.937)
07	23.76 (0.935)	27.88 (1.098)
08	27.72 (1.074)	31.74 (1.250)
09	31.68 (1.247)	35.86 (1.412)
10	35.64 (1.403)	39.90 (1.571)
11	39.60 (1.559)	43.84 (1.726)
12	43.56 (1.715)	47.92 (1.887)

SPECIFICATIONS

Current Rating: 5 Amps
Voltage Rating: 250 VAC
Operating Temperature: -25°C to +85°C
Contact Resistance: 10 m ohms max.
Insulation Resistance: 1000 Megaohms min.
Contact Material: Brass with Tin Plating
Insulator Material: 66, UL 94V-0

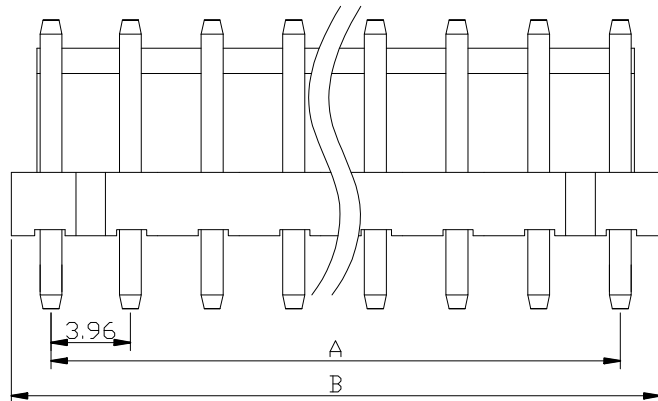


WLH1-XXS-X-FG

Poles 02-12

STRAIGHT

FG: RoHS Compliant

COLOR:
3=Black
R=Red
Y=Yellow
B=Blue

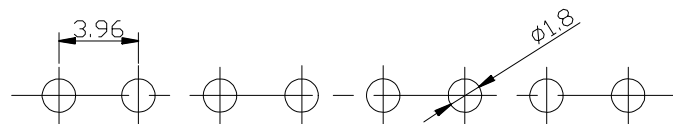

RECOMMENDED P.C. BOARD HOLE DIMM.

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	± X	.XX	± 0.20
XX.	± X	.XXX	± X
X.	± 0.50	X.*	± 5°
.X	± 0.30	.X*	± X°
REV.	A	DRAWN	06/22/11
DATE	06/22/11	CHECKED	
SCALE	As shown	APPROVED	
UNIT	mm		
		SIZE	A4
		FILE NAME:	WLH1-XXS-X-FG.dwg

APTOS TECHNOLOGY

WLH1 Series

3.96mm 180° DIP Wire-to-board Header

PRODUCT NO.

WLH1-XXS-X-FG