
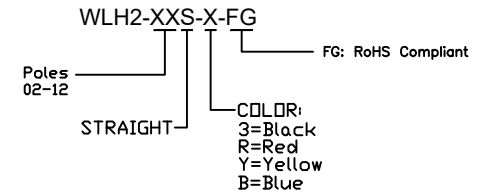
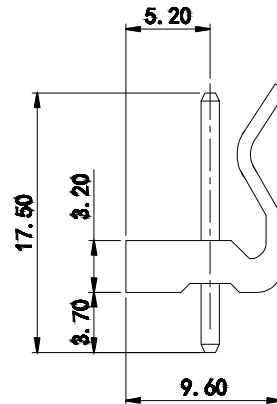


RECOMMENDED P.C BOARD HOLE DIMM.

SPECIFICATIONS

Current Rating: 5 Amps
 Voltage Rating: 250 VAC
 Operating Temperature: -25°C to $+85^{\circ}\text{C}$
 Contact Resistance: 10 m ohms max.
 Insulation Resistance: 1000 Megaohms min.
 Dielectric Withstanding: 1500V AC
 Insulator Material: Nylon66, UL 94V-2

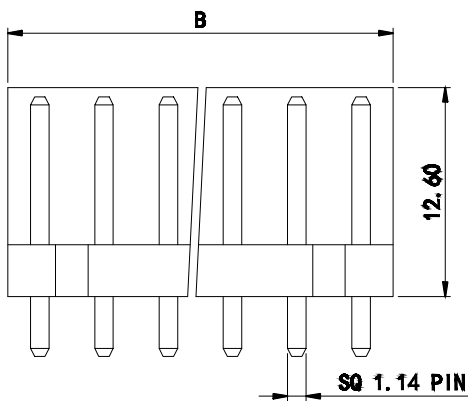

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

Poles	Dimension, mm	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED

XXX.	\pm X	.XX	\pm 0.20
XX.	\pm X	.XXX	\pm X
X.	\pm 0.50	X.	\pm 5"
.X	\pm 0.30	.X	\pm X"

AP APTOS TECHNOLOGY

REV.	A	DRAWN	6/15/18
DATE	6/15/18	CHECKED	
SCALE	As shown	APPROVED	
UNIT	mm		

WLH2 Series	
3.96mm 180° DIP Wire-to-board Header	
PRODUCT NO.	WLH2-XXS-X-FG
FILE NAME:	WLH2-XXS-X-FG.dwg