

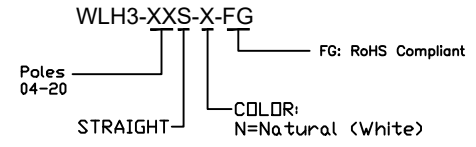
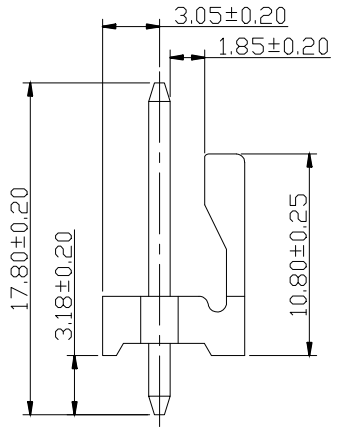


**SPECIFICATIONS**

- Current Rating: 7 Amps
- Voltage Rating: 600 VAC
- Dielectric withstanding: 2200V AC
- Operating Temperature: -25°C to +85°C
- Contact Resistance: 3 m ohms max.
- Insulation Resistance: 5000 Megaohms min.
- Contact Material: Brass with Tin Plating
- Insulator Material: 66, UL 94V-0
- Color: Natural (White)

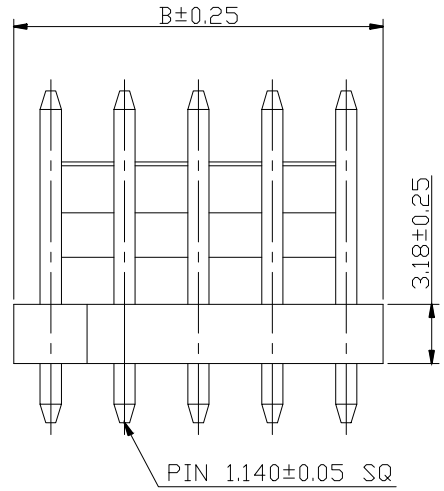

APTOS Technology CONFIDENTIAL  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	3.96	7.92	12P	43.56	47.52
03P	7.92	11.88	13P	47.52	51.48
04P	11.88	15.84	14P	51.48	55.44
05P	15.84	19.80	15P	55.44	59.40
06P	19.80	23.76	16P	59.40	63.36
07P	23.76	27.72	17P	63.36	67.32
08P	27.72	31.68	18P	67.32	71.28
09P	31.68	35.64	19P	71.28	75.24
10P	35.64	39.60	20P	75.24	79.20
11P	39.60	43.56			

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.20
XX. ± X	.XXX ± X
X. ± 0.50	X' ± 5"
.X ± 0.30	.X' ± X"



REV. A	DRAWN	6/15/18	WLH3 Series
DATE 6/15/18	CHECKED		3.96mm 180° Locking Wafer Header
SCALE As shown	APPROVED		PRODUCT NO. WLH3-XXS-X-FG
UNIT mm		SIZE A4	FILE NAME: WLH3-XXS-X-FG.dwg